



NPN Digital Transistors (Built-in Resistors)

Features

Moisture Sensitivity Level 1

Surface mount package ideally Suited for Automatic
Insertion

Epoxy meets UL-94 V-0 flammability rating, halogen-free



DTC144WE



Electrical Characteristics (Ta=25 unless otherwise specified)

ITEM	SYMBOL	UNIT	CONDITIONS	MIN	TYP	MAX
Input voltage	$V_{I(off)}$	V	$V_{CC}=5V, I_c=100\mu A$	0.8		
	$V_{I(on)}$	V	$V_o=0.3V, I_c=2mA$			4
Output voltage	$V_{O(on)}$	V	$I_o / I_i = 10mA / 0.5 mA$			0.3
Input current	I_i	mA	$V_i=5V$			160
Output current	$I_{o(off)}$	μA	$V_{CC}=50V, V_i=0$			0.5
DC current gain	G_i		$V_o=5V, I_o = 5mA$	56		
Input resistance	R_1	k		33	47	61
Resistance ratio	R_2/R_1			0.37	0.47	0.57
Transition frequency	f_T	MHz	$V_o=10V, I_o=5mA, f=100MHz$		250	

Ordering Information (Example)







Preferred P/N	Packing code	Unit Weight(G)	Minimum Package(Pcs)	Inner Box Quantity(Pcs)	Outer Carton Quantity(Pcs)	Delivery Mode
DTC144WE	F2	Approximate 0.0027	3000	30000	120000	7" reel

Thermal Characteristics

	Symbol	Unit	Value
Thermal resistance, junction-to-ambient	$R_{J-A}^{(1)}$	/W	833



Characteristics (Typical)

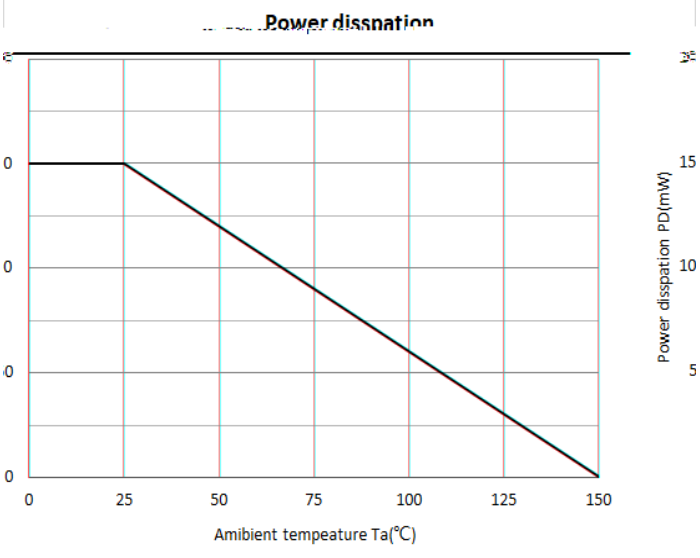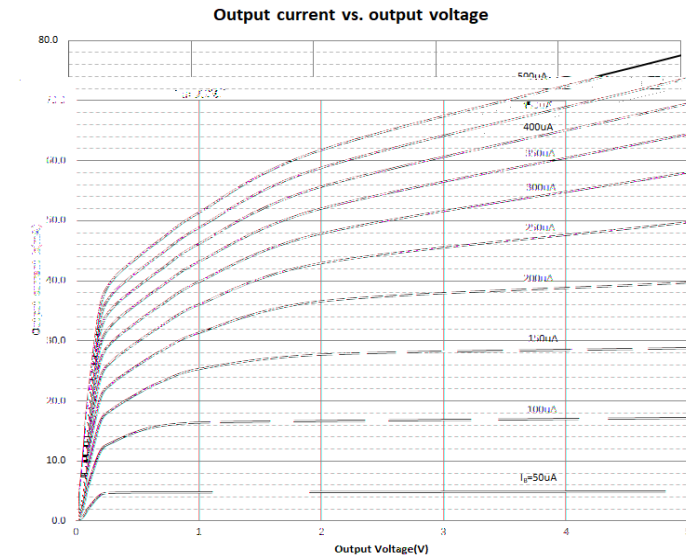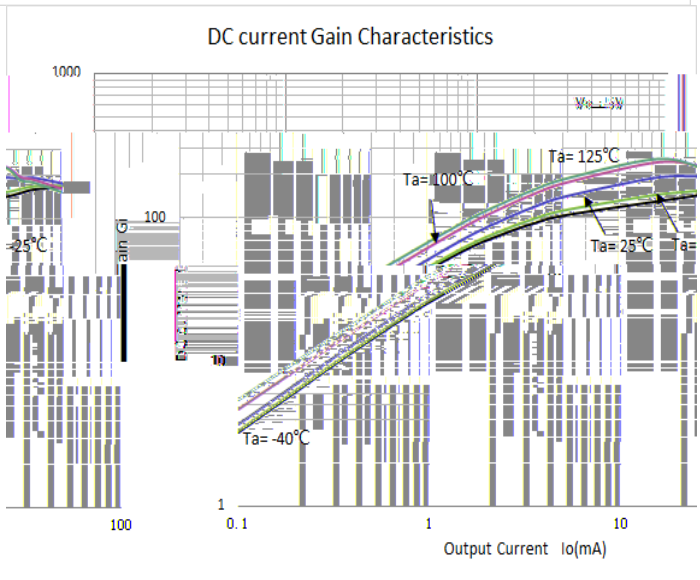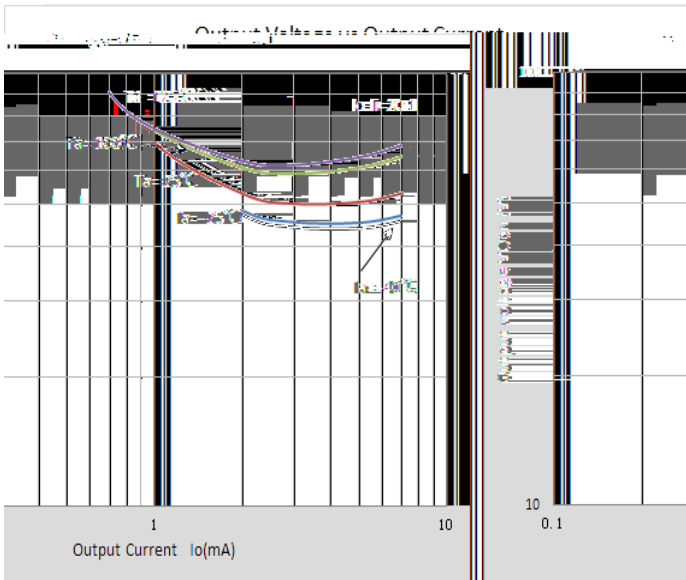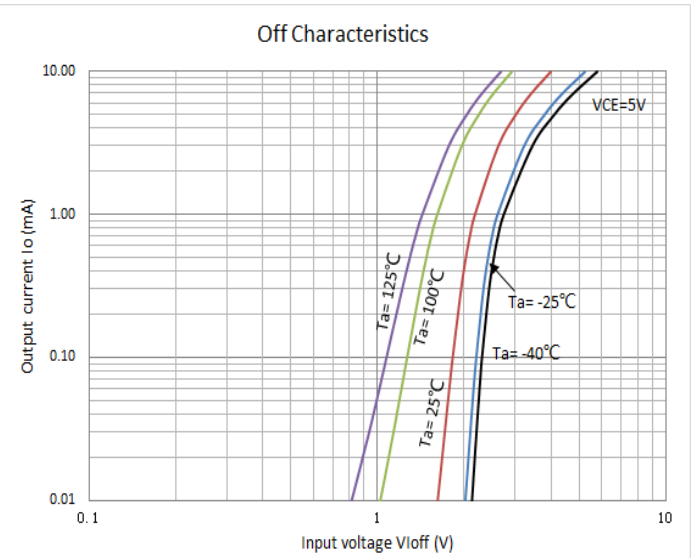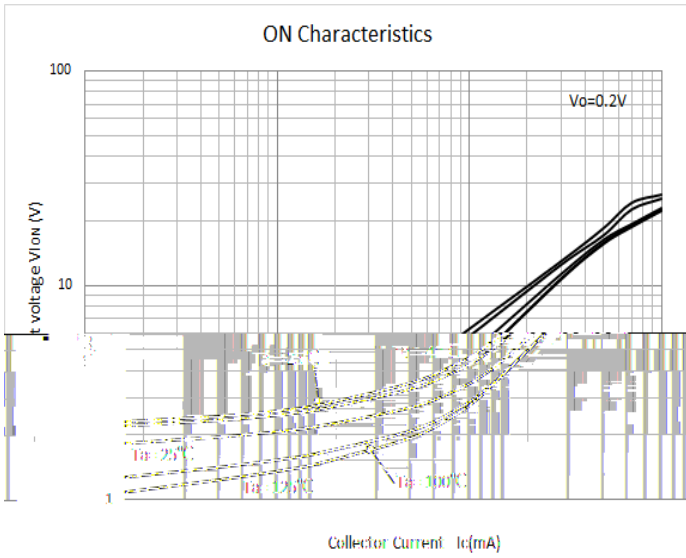



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.